

Terminale SUNMI L2s PRO Smart Mobile

È ora di L2S PRO le tue operazioni in prima linea.

Powered by
SUNMI OS

Compatible with
SUNMI DMP

Scansione di codici a barre rapida e senza interruzioni.

Read scratched, stained, crinkled barcodes up to 1m away even on the high shelves in your warehouse.

Tripla protezione.

L2s PRO is specifically designed to sustain rough environments: IP68 rating, 1.5 drop rate and up to 1.2m deep water for 30 min.


La lunga durata della batteria consente prestazioni stabili.

The removable ATL 5000mAh battery features long run time, making L2s PRO a good choice for battery intensive usage. With 18W quick charge, it can be fully charged in 3 hours, further reducing your operations downtime.



Accessori multipli

Base ricarica singola
Charge the PDA device.



Base di ricarica

PDA and battery can be charged simultaneously, an UHF trigger handle can also be charged with the base.



Base di ricarica 4 slot

Support up to 4 PDA charging simultaneously, and can also be charged with a protective case, trigger handle, or hand cinghi.



Caricabatteria a 4 slot

Support charging up to 4 batteries simultaneously and intelligent battery management.



Maniglia grilletto
Further improve your barcode scanning efficiency especially for warehousing, manufacturing and logistics.



Settori.

Impugnatura del grilletto UHF*
Read multiple RFID tags at once.
Fastest read rate for RFID tags >200 tags/sec.
Longest read range for an RFID tag >10M.

The read rate and range depend on actual environments.



Enhanced Performance

Octa-core 2.0GHz processor

Multiple memory config options.
3+32GB, 4+64GB, 6+128GB

OCTA
CORE

Strong Protection

IP68³.
1.5m drop spec⁴.
Corning Gorilla Glass
touchscreen for enhanced drop
and scratch resistance.



NFC



SUNMI OS¹

Designed for business scenarios.
Smooth, secure and reliable.



SUNMI DMP

Manage everything of your
devices.

High Volume




Fast and Accurate Reading

Read distance up to one meter⁵.
Read scratched or crinkled barcodes.
Read barcodes under strong light.
OCR.



Long Battery Life

5000mAh battery +
18W quick charge⁶.
Long battery runtime.

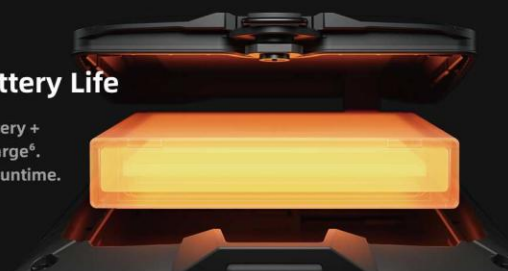

Specifiche tecniche di SUNMI L2s PRO

Modello del prodotto

T8920

Sis

SUNMI OS
(*based on Android 12)

Processore

Cortex-A53, octa-core
(4*2.0GHz+4*1.5GHz)

Memoria

3GB RAM+32GB ROM
4GB RAM+64GB ROM
6GB RAM+128GB ROM
(optional)

Esporre

5.5" HD+, 1440*720, IPS
Capacitive multi-touch

Macchina fotografica

Rear: 13MP, AF, Flash,
support 1D/2D
barcode scanning

Lettore NFC

Supports TypeA&B card,
Mifare card, Felica card,
ISO/IEC 14443 and
ISO15693 compliant

Scanner

1D/2D barcode scan
engine

Altoparlante

1* 1.5W

Slot per schede

1* PSAM
1* NANO SIM + 1* MINI SIM
1* MicroSD (TF) up to 256G

Rete

2G&3G&4G

Wi-Fi

2.4GHz/5GHz
IEEE 802.11 a/b/g/n/ac

Connessione Bluetooth

BLE

GPS

AGPS
GPS, Glonass, Beidou,
Galileo

MICROFONO

2* MIC

Pulsanti

1* Power on/off button
1* Custom button
2* Volume (+/-) button
2* Scan button (left/right)

Porte

1* Audio jack
1* Type-C USB OTG supported
2* Pogo pin at the bottom for charging
8* Pogo pin on the back for accessories

Sensore

Gravity Sensor,
Light Sensor,
Compass, Distance Sensor,
Barometer Sensor (optional)

Batteria

Removable polymer lithium
battery, 3.8V/5000mAh

Adattatore di alimentazione

Output: 9V 2A / 5V 2A
*Vary from different versions

Dimensioni (L*W*H)

154.4*74.6*17.1mm

Peso totale

250g
*Vary from different versions

Livello di protezione

Grado di protezione IP68
1.5m drop test
*Data from Third-party Lab

Ambiente

Operating temperature:
-20°C~55°C
Storage temperature:
-40°C ~ 70°C

Accessori (opzionali)

Single charging base, Charging base, Trigger handle, UHF trigger handle, Hand strap (included),
4-slot charging base, 4-slot battery charger, Protective case, Screen tempered glass

1. Based on Android 12, SUNMI OS is customized for business scenarios.

3-5. Certified by third-party authorities.

6. Quick charging functions optional.

7. The usable memory may be less than the installed memory.

8. All specifications are subject to change without (prior) notice.